


See Hendrickson publication L498, SURELOK Operator's Manual for further instructions.
 L971 09-08 Rev A EDN 27538 ©2009 Hendrickson USA, L.L.C. (U.S. Rights) Hendrickson International Corporation (Rights Outside U.S.) All Rights Reserved

NOTES

1. Decal shown actual size (3.25" x 5").
2. Use one of the following adhesives:
 - a. Fasson Tire Label II (TL2). Hot melt rubber on latex impregnated paper with barrier coating on adhesive side.
 - b. P1480.
3. Decal must have removeable mylar painting mask or equivalent. Mask must be undercut 1/4 inch from top, left and bottom edges as shown below

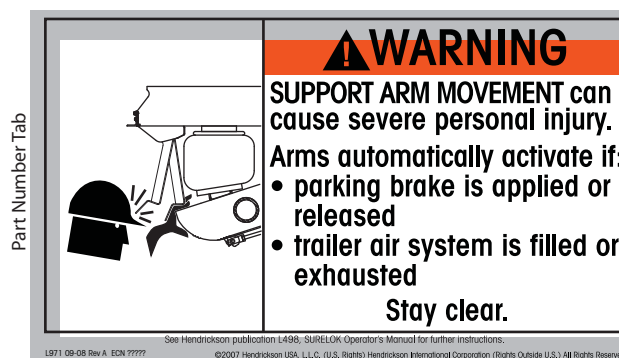

1/4-inch undercut