

HK190T / HK230 SPECIFICATIONS

LIT NO: L490 **DATE:** June 2007

REVISION: B



TABLE OF CONTENTS

APPLICATIONS	2
SPECIFICATIONS	2
Slider / Suspension	2
OPTIONS	
Ride Heights	
Air Tank Brackets	
Air Tank Mounting Hardware Kits	3
Manual Stop Bar	3
SURELOK®	3
Stinger	3
Mud Flap Mounting Angle	?






APPLICATIONS

	HK190T	HK230				
CAPACITY:	40,000 lbs. (18 000 kg)	46,000 lbs. (20 700 kg)				
TRAILER TYPES:	UNITED STATES AND CANADA Van Reefer	MEXICO, CENTRAL AND SOUTH AMERICA None				
*AXLE DATA:	5-inch diameter round					
AXLE ARRANGEMENT:	49-inch maximum tandem spacing					
PIN-PULL MECHANISM:	Fully pneumatic QUIK-DRAW®					
FRAME TYPES:	Steel only; 96-inch or 102-inch wide	e trailers				

^{*}Hendrickson recommends 0.625" nominal wall thickness.

SPECIFICATIONS

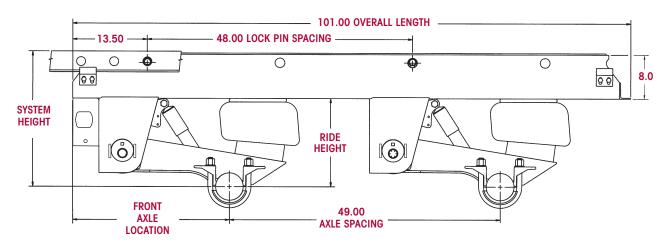

SLIDER / SUSPENSION

RIDE	SYSTEM	FRONT AXLE	JOUNCE	REBOUND (inches)	WEIGHT (48-inch Wide Box)	
HEIGHT (inches)	HEIGHT (inches)	LOCATION (inches)	(inches)		HK190T	HK230
16	24.5	28.4	3.0	3.0	1011 lbs.	1008 lbs.
17	25.5	28.7	3.1	3.0	1021 lbs.	1028 lbs.
18	26.5	28.4	3.1	3.1	1027 lbs.	1034 lbs.
19	27.5	28.0	3.1	3.1	1032 lbs.	1039 lbs.

NOTE: Weight includes all slider and tandem suspension components and QUIK-DRAW pin-pull mechanism. Axle and body rail weights are not included. Add 9 pounds for spacer plates. Deduct 12 pounds for a 42-inch wide box.



OPTIONS

RIDE HEIGHTS

16-inch to 19-inch.

AIR TANK BRACKETS

Weldable bracket accommodates $27\frac{1}{2}$ -inch to 32-inch long air tanks. Two brackets are required per air tank.

AIR TANK MOUNTING HARDWARE KITS

Available for 42-inch and 48-inch boxes.

MANUAL STOP BAR

Efficiently assists the driver in slider box repositioning.

SURELOK®

Dock height lock that maintains trailer at deck height while minimizing trailer walk during loading and unloading.

STINGER

Bolt-on bracket available in 32- or 36-inch length; mounts on either road or curbside of suspension.

MUD FLAP MOUNTING ANGLE

Bolt-on bracket, attaches to rear cross member.

www.hendrickson-intl.com



Trailer Suspension Systems 250 Chrysler Drive, Unit #3 Brampton, ON Canada L6S 6B6 905.789.1030 Fax 905.789.1033 Trailer Suspension Systems 2070 Industrial Place SE Canton, OH 44707-2641 USA

866.RIDEAIR (743.3247) 330.489.0045 Fax 800.696.4416 Trailer Suspension Systems Av. Industria Automortriz #200 Parque Industrial Stiva Aeropuerto Apodaca, N.L., México C.P. 66600 (52) 81 8288 1300 Fax (52) 81 8288 1301